

For toughened glass assemblies with single-action doors

DORMA EA patch fittings are characterised by their slim, neat shape and skilful hinge design. This comprehensive range of fittings allows the transparent elegance of single-action doors to reach their full potential – whether hung in frames or integrated in toughened glass assemblies.

DORMA EA patch fittings have been designed for minimal preparation – cutouts and drilling are simple and easy.

They are supplied as standard with gaskets for 10 mm glass, although gaskets for 8 mm glass can be supplied as optional extras. Fittings for 12 mm glass are available on request.

Door dimensions

Doors in rebated frames

with 24 mm frame stop depth

- Max. door weight:75 kg
- Max. door width:1000 mm


Doors in toughened glass assemblies

without rebate

- Max. door weight:80 kg
- Max. door width:1100 mm








X = 6 mmfor single leaf width 600 - 1000 mm


X = 4 mm for single leaf width over 1000 mm

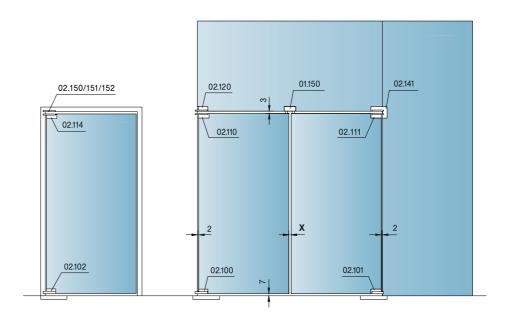


For single-action doors in rebated frames

with 24 mm frame stop depth

02.102/02.103*Bottom patch for DORMA BTS floor spring, free glass edge at side




For single-action doors in toughened glass assemblies without rebate



02.100/02.101*Bottom patch for DORMA BTS floor spring


02.104/02.105*
Bottom patch for
DORMA BTS floor
spring, free glass
edge at side and
bottom



116


02.110/02.111*Top patch

02.112/02.113*Top patch, free glass edge at side



02.120/02.121* Overpanel patch






170


02.140/02.141*Patch for overpanel and side panel

02.122/02.123*Overpanel patch

glass edge at side

and bottom






01.150Overpanel connector (PT 70)

02.206/02.207*

Top patch complete with pivot for frame fixing





*LH/RH



02.200/02.201*


Top patch complete with pivot for side panel






02.204/02.205*


Top patch complete with pivot for frame fixing (for frames with 24 mm rebate, 02.206/02.207*)






02.202/02.203*


Top patch complete with pivot for wall fixing






02.150


Frame top centre with fixing block for timber, steel or aluminium frames






02.151


Frame top centre with angle bracket for timber frames






02.152/02.153*

Frame top centre with wedge screw fixings for steel frames





*LH/RH